

26.600 G

OEM Pressure Transmitter Standard

Applications

- ▶ mechanical and plant engineering
- ▶ general industrial applications

Characteristics

- ▶ ceramic sensor
- ▶ accuracy 0.5 % FSO according to IEC 60770
- ▶ nominal pressure ranges from 0 ... 1 bar up to 0 ... 400 bar
- ▶ option: oil and grease free version



Technical Data



Input pressure range																
Nominal pressure gauge [bar]	-1...0 ¹	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	
Nominal pressure abs. [bar]	-	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400	
Overpressure [bar]	3	3	5	5	12	12	20	50	50	120	120	200	400	400	650	
Burst pressure ≥ [bar]	4	4	7	7,5	15	18	30	70	75	150	180	300	500	750	1000	
Vacuum resistance	unlimited															

¹ for this pressure range accuracy is ≤ 1 % FSO IEC 60770

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}
Options	3-wire: 0 ... 10 V / V _S = 14 ... 30 V _{DC} 3-wire ratiometric: 10 ... 90% of V _S / V _S = 2.7 ... 5 V _{DC}
Performance	
Accuracy ²	≤ ± 0.5 % FSO
Permissible load	2-wire: R _{max} = [(V _S - V _{S,min}) / 0.02 A] Ω 3-wire: R _{min} = 10 kΩ
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ
Response time	2-wire: ≤ 10 msec 3-wire: ≤ 3 msec
Long term stability	≤ ± 0.3 % FSO / year at reference conditions
Measuring rate	1 kHz
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)	
Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	≤ ± 0.3 % FSO / 10 K in compensated range: -25 ... 85 °C
Permissible temperatures	medium: -25 ... 125 °C electronics / environment: -25 ... 85 °C storage: -40 ... 85 °C
Electrical protection	
Short-circuit protection	permanent 3-wire ratiometric: none
Reverse polarity protection	no damage, but also no function
Electromagnetic protection	emission and immunity according to EN 61326
Mechanical stability	
Vibration	10 g, 25 Hz ... 2 kHz according to DIN EN 60068-2-6
Shock	500 g / 1 msec according to DIN EN 60068-2-27

Materials	
Pressure port / housing	stainless steel 1.4301 (304)
Seals (media wetted)	FKM others on request
Diaphragm	ceramics Al ₂ O ₃ 96 %
Media wetted parts	pressure port, seals, diaphragm
Miscellaneous	
Option oxygen application	for P _N ≤ 15 bar: O-ring in 70 EPDM 281 (with BAM-approval); permissible maximum values are 15 bar / 60° C and 10 bar / 90° C for P _N ≤ 25 bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C
Weight	approx. 120 g
Current consumption	2-wire: max. 25 mA 3-wire ratiometric: typ. 1.5 mA 3-wire voltage: max. 7 mA (short circuit current: max. 20 mA)
Operational life	> 100 x 10 ⁶ cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) ³

³ This directive is only valid for devices with maximum permissible overpressure > 200 bar


Wiring diagrams



Pin configuration

Electrical connection	ISO 4400	Micro (contact distance 9.4 mm)	M12x1 (4-pin), plastic	cable colours (DIN 47100)
Supply +	1	1	1	wh (white)
Supply -	2	2	2	bn (brown)
Signal + (for 3-wire)	3	3	3	gn (green)
Shield	ground pin	ground pin	4	ye/gn (yellow / green)

Electrical connections (dimensions in mm)

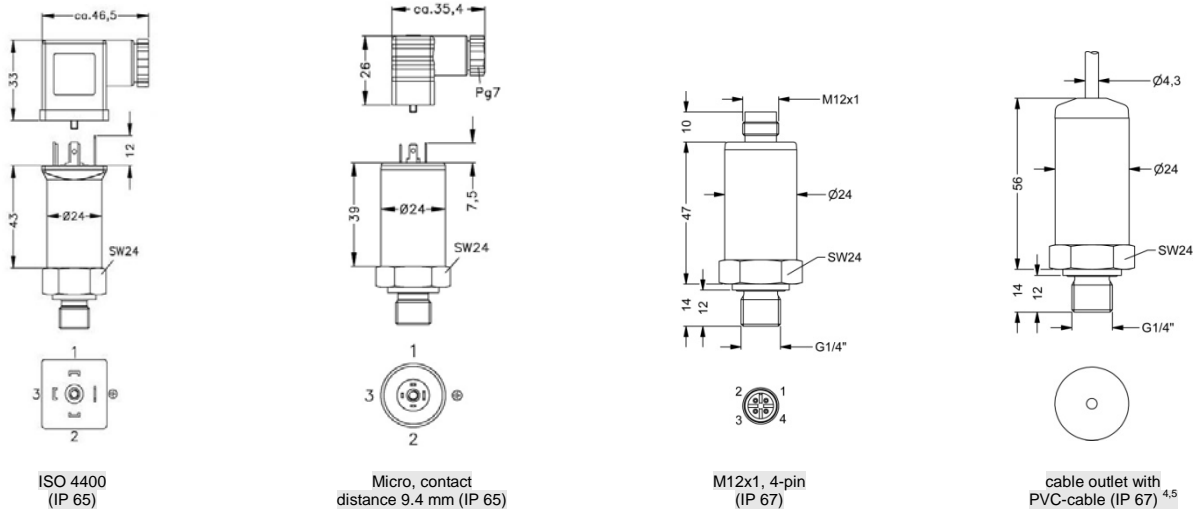


* pressure range P_N = 400 bar: total length increases by 12 mm.

⁴ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

⁵ different cable types and lengths available, permissible temperature depends on kind of cable

Mechanical connection (dimensions in mm)

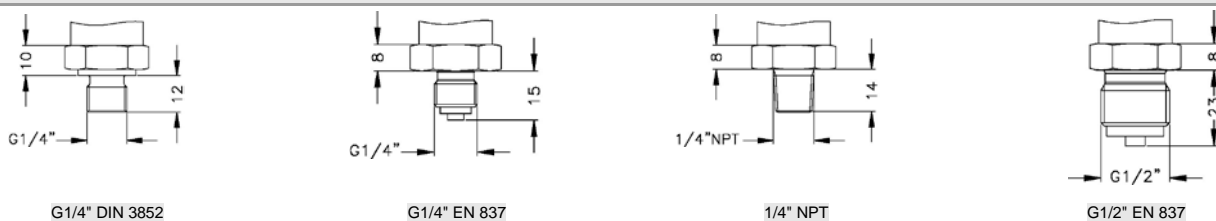

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

