

# High Pressure and Severe Service Valve

## Type HP-15

### DESCRIPTION

The Type HP-15 is a high-pressure control valve using a 17-4ph stainless steel body along with a solid Stellite® innervalue assembly.

### APPLICATIONS

The Type HP-15 valve is used in industrial applications research, and process pilot plants on liquids and gases. The main use is in high-pressure chemical injection used in offshore oil production rigs.

### MATERIALS

<b>Body</b>	17-4 PH
<b>Innervalue</b>	Stellite 6B (plug and seat)
<b>Packing</b>	Standard is teflon CV rings
<b>Actuator</b>	
Standard	Painted carbon steel
Optional	Stainless steel

### ACTUATOR CHOICES


<b>Standard</b>	Air-to-open, fail close Air-to-close, fail open
<b>Effective Area</b>	35 square inches
<b>Standard Signals</b>	3-15#, 3-27#, 6-30#
<b>Optional Signals</b>	With positioner, 3-9#, 9-15#
<b>Accessories</b>	Filter regulator, gauges, I/P, limit switches, handwheel on standard unit, solenoids

### STANDARD FEATURES

- 1/4 in. (6 mm) and 1/2 in. (12 mm) sizes
- Wide range of interchangeable trims
- Choice of linear or quick opening trims
- ANSI Class III shutoff for sizes P-1...P-9
- ANSI Class IV shutoff for sizes K...O
- Solid Stellite innervalue
- High pressure Autoclave fittings
- Pressure rating of 15,000 psi (1034 bar) @ 100° F (38° C)





*Shown with optional stainless steel actuator*

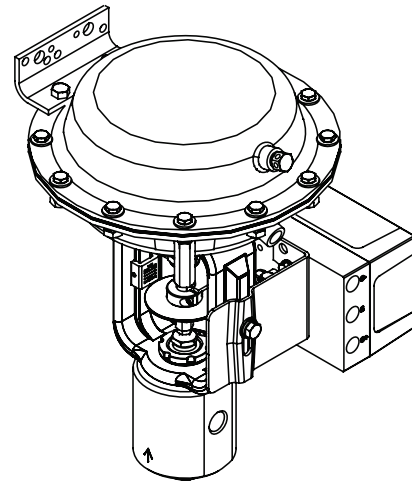


*Shown with optional side-mounted positioner*

**DIMENSIONS FOR 1/4 IN. (6 MM) VALVE**

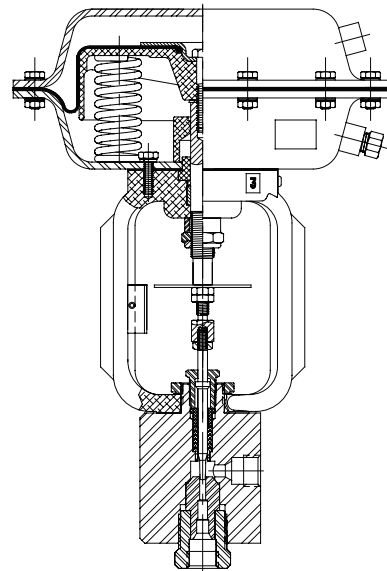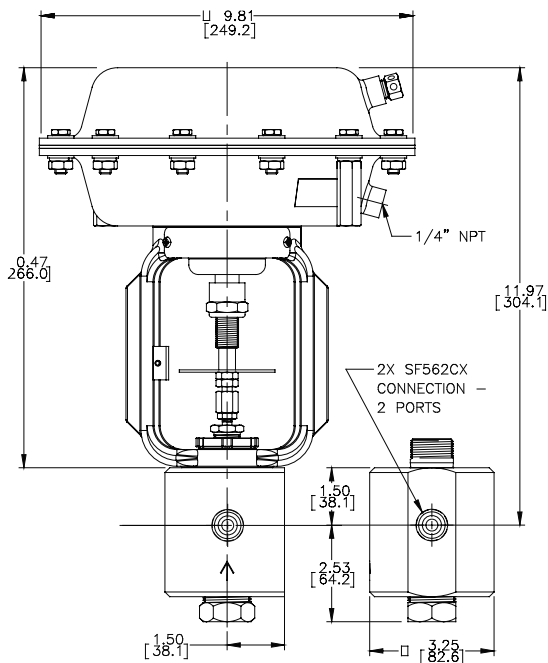

**DIMENSIONS FOR 1/2 IN. (12 MM) VALVE**

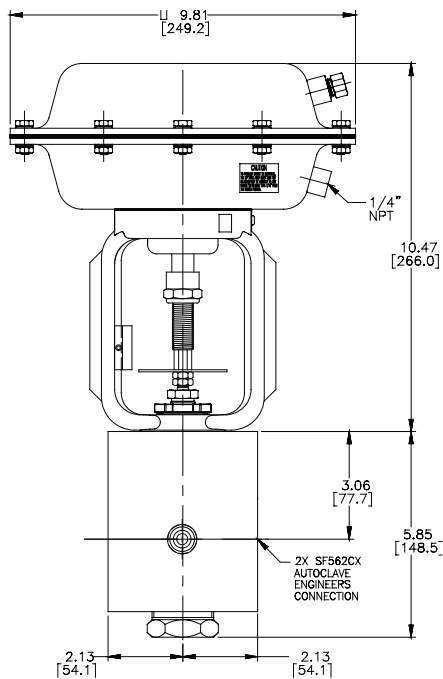

**TRIM CHART**

Valve Size	Trim Size	Max. Cv	Stem Dia. in. (mm)	Orifice Dia. in. (mm)	Orifice Area in. <sup>2</sup> (mm <sup>2</sup> )	Nominal Rangeability	
						Linear	Equal %
1/2 in. (12.7 mm)	A	2.5	0.312 (7.9)	0.375 (9.5)	0.110 (71.0)	40:1	50:1
	B	2.0	0.312 (7.9)	0.375 (9.5)	0.110 (71.0)	40:1	50:1
	C	1.25	0.312 (7.9)	0.281 (7.1)	0.062 (40.0)	40:1	50:1
	D	0.80	0.312 (7.9)	0.250 (6.4)	0.049 (31.6)	40:1	50:1
	E	0.50	0.312 (7.9)	0.250 (6.4)	0.049 (31.6)	40:1	50:1
1/4 in. (6.5 mm)	F	0.32	0.188 (4.8)	0.156 (4.0)	0.019 (12.3)	30:1	40:1
	G	0.20	0.188 (4.8)	0.156 (4.0)	0.019 (12.3)	30:1	40:1
	H	0.13	0.188 (4.8)	0.156 (4.0)	0.019 (12.3)	30:1	40:1
	I	0.08	0.188 (4.8)	0.156 (4.0)	0.019 (12.3)	30:1	40:1
	J	0.05	0.188 (4.8)	0.156 (4.0)	0.019 (12.3)	30:1	40:1
	K	0.03	0.188 (4.8)	0.086 (2.2)	0.005 (3.2)	25:1	—
	L	0.02	0.188 (4.8)	0.086 (2.2)	0.005 (3.2)	25:1	—
	M	0.01	0.188 (4.8)	0.086 (2.2)	0.005 (3.2)	25:1	—
	N	0.006	0.188 (4.8)	0.086 (2.2)	0.005 (3.2)	25:1	—
	O	0.003	0.188 (4.8)	0.086 (2.2)	0.005 (3.2)	25:1	—
	P-1	0.002	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-2	0.0013	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-3	0.001	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-4	0.0006	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-5	0.0004	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-6	0.00027	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-7	0.00018	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-8	0.00012	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—
	P-9	0.00008	0.188 (4.8)	0.063 (1.6)	0.003 (1.9)	15:1	—

**Control. Manage. Optimize.**

Research Control is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2017 Badger Meter, Inc. All rights reserved.

[www.badgermeter.com](http://www.badgermeter.com)

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400  
 México | Badger Meter de las Américas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882  
 Europe, Eastern Europe Branch Office (for Poland, Latvia, Lithuania, Estonia, Ukraine, Belarus) | Badger Meter Europe | ul. Korfantego 6 | 44-193 Knurów | Poland | +48-32-236-8787  
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtlinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0  
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503  
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01  
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836  
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412  
 Switzerland | Badger Meter Swiss AG | Mittelholzerstrasse 8 | 3006 Bern | Switzerland | +41-31-932 01 11